



RELTECH

Where the water flows best...



Sunsol SS Series Pool & Spa Pump

- Ultra Low Noise Operation
- Minimal Operating Costs
- Suitable For Above Ground And Small To Medium In-Ground Pools
- Comes With Non Return Flap For Solar Applications
- Australian Made



www.reltech.com.au

SS SUNSOL SERIES

The SS Sunsol Series thrives in pool environments that require low to medium head pressure and flow. It has been specifically designed for above ground pools, small to medium in-ground pools and spas and for solar applications.

If you require an energy efficient, low noise and competitively priced pool and spa pump then look no further than the SS Sunsol Series.

DURABLE, RELIABLE, SAFE & DESIGNED TO LAST

- Strongly constructed thick walled, one piece pump body made from a high quality engineering grade thermoplastic material that is corrosion resistant. A glass reinforcement and UV additives also ensures the pump is designed to last in all weather conditions.
- Reliable motor rated for continuous operation ensures a long bearing life.
- A stainless steel pump shaft, a lapped true carbon face, ceramic seal and stainless steel assembly nuts and bolts are just some of the quality components used to ensure ongoing reliability and extended lifecycle.

QUIET & ENERGY EFFICIENT


- The design characteristics of the diffuser and balanced impeller system ensures low noise operation whilst offering excellent priming. It also offers constant water flow and filtration at economical running costs.

USER FRIENDLY & FUNCTIONAL

- Extra large robust strainer basket prevents breakage during operation and debris removal and requires less frequent cleaning.
- Positively located strainer basket to eliminate the inlet being blocked.
- Easy removable clear inspection lid for quick and easy routine maintenance and cleaning of strainer basket.
- No stress on the sealing o-rings because clamping pressure is used rather than twisting pressure, therefore extending the life of spare parts on your pump.
- Comes with non return flap for solar applications to prevent back flow.
- Self aligning inlet and outlet barrel unions for both suction and discharge ports allowing for quick and easy installation and removal.
- Sunsol SS Series is covered by a limited 2 year warranty against defects in materials and workmanship (refer to Operating + Installation Manual for full details).


AVAILABLE FROM

SS SERIES PERFORMANCE CURVES

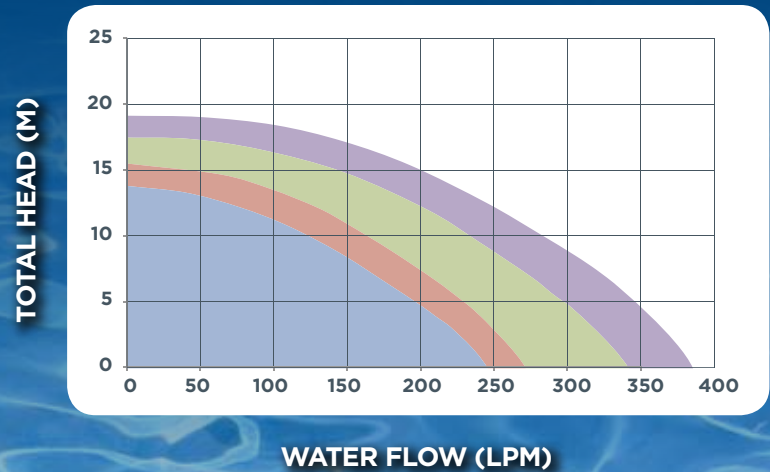

■ SS 50 ■ SS 75 ■ SS 100 ■ SS 125

RELTECH SUNSOL SS SERIES MODEL	HP	FLOW RATE @ 8mtr HEAD	VOLTS / PHASE	FULL LOAD AMPS	WATTS INPUT	MAX NOISE dB(A) @ 1mtr	LENGTH OF PUMP (A)
SS 50	0.50	150	240 / 1	2.87	650	55	605
SS 75	0.75	170	240 / 1	3.30	710	58	625
SS 100	1.00	250	240 / 1	4.02	910	60	605
SS 125	1.25	300	240 / 1	4.90	1100	62	610

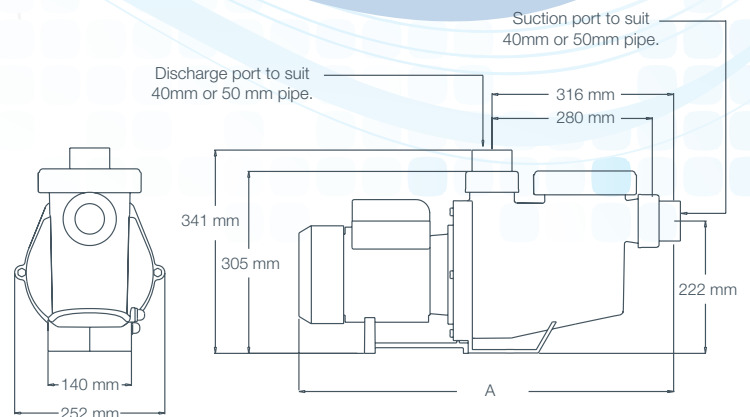

RELTECH
Where the water flows best...

43-45 Kylta Road, West Heidelberg Victoria 3081 Australia
P: + 613 9459 3838 F: + 613 9459 4038 E: office@reltech.com.au